




**P** 定货指南 2020  
PRODUCT QUOTATION

# 目录 | CONTENTS

- Company Profile -----
- Fiber Splitter Series -----
- Optical Fiber Patch cord -----
- Optical Pigtail Series -----
- Fiber Cable Joint Enclosure -----
- Fiber Distribution Box -----
- FTTH Fast Connector Series -----
- Fiber Optic Rossette Box -----
- Fiber Cross Connect Cabinet -----
- Optic Distribution Frame (ODF) -----
- Fiber Optic Terminal Box -----
- Drop Cable -----
- Accessories -----

以诚待人 以信立企  
With sincerity to enterprise

# COMPANY PROFILE 企业简介

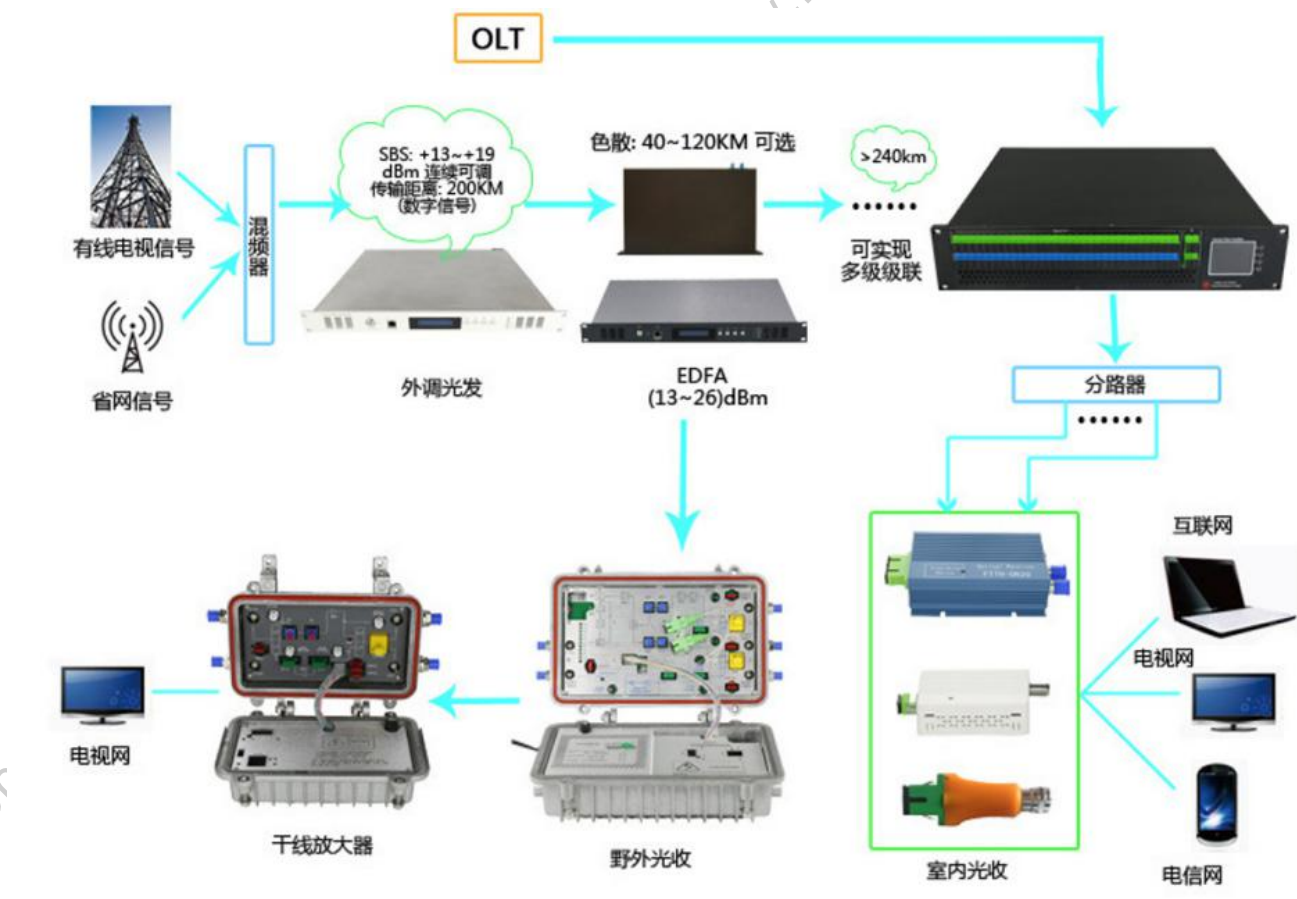

产品至精 服务至善  
追求卓越 创优品牌

EXTREME USERS, TALENT FIRST, TO REFINED PRODUCTS,  
SERVICE EXCELLENCE, THE PURSUIT OF EXCELLENCE, A QUALITY BRAND.

# Cassette Type Splitter



Cassette Type 1\*2 Optical Splitter

Dimensions	130X100X25mm	Carton Size	690X550X250 mm
Single Weight	95g	Adaptor	SC型
Material	ABS	Total Quantity	200 只
Connector	SC/FC/LC UPC/APC	Total Weight	20.6KG
Diameter	0.9mm	PRICE/USD	



Cassette Type 1\*4 Optical Splitter

Dimensions	130X100X25mm	Carton Size	690X550X250 mm
Single Weight	104g	Adaptor	SC
Material	ABS	Total Quantity	200 只
Connector	SC/FC/LC UPC/APC	Total Weight	22.8KG
Diameter	0.9mm	PRICE/USD	

Please inform the connector type and packaging details before ordering



Cassette Type 1\*8 Optical Splitter

Dimensions	130X100X25mm	Carton Size	690X550X250 mm
Single Weight	125g	Adaptor	SC
Material	ABS	Total Quantity	200 只
Connector	SC/FC/LC UPC/APC	Total Weight	27KG
Diameter	0.9mm	PRICE/USD	



Cassette Type 1\*16 Optical Splitter

Dimensions	130X100X50mm	Carton Size	690X550X250 mm
Single Weight	201g	Adaptor	SC
Material	ABS	Total Quantity	200 只
Connector	SC/FC/LC UPC/APC	Total Weight	22.1KG
Diameter	0.9mm	PRICE/USD	

Please inform the connector type and packaging details before ordering



Cassette Type 1\*32 Optical Splitter

Dimensions	130X102X100mm	Carton Size	690X550X250 mm
Single Weight	354g	Adaptor	SC
Material	ABS	Total Quantity	50 pcs
Connector	SC/FC/LC UPC/APC	Total Weight	19.7KG
Diameter	0.9mm	Price/RMB	

Please inform the connector type and packaging details before ordering




Cassette Type 2\*32 Optical Splitter

Dimensions	267X100X50mm	Carton Size	690X550X250 mm
Single Weight	403g	Adaptor	SC
Material	ABS	Total Quantity	50 pcs
Connector	SC/FC/LC UPC/APC	Total Weight	22.1KG
Diameter	0.9mm	Price/RMB	

Please inform the connector type and packaging details before ordering



# 光分路器 (ABS 盒式)

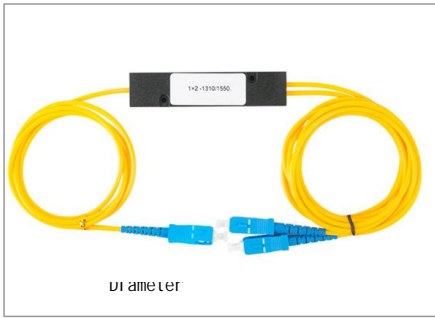

ABS FBT Splitter 1\*2

Dimensions	90X20X10mm	Packaging	Blister box SC/1.5M
Single Weight	38g	Carton Size	580X480X375 mm
Material	ABS	Quantity	100 pcs
Connector type	SC/FC/LC/UPC/APC	Total Weight	5.75KG
Di ameter	0.9mm 2.0mm 3.0mm	Price/UDS	

Please inform the connector type and packaging details before ordering



ABS FBT Splitter 1\*3

Dimensions	100X80X18mm	Packaging	Blister box SC/1.5M
Single Weight	94g	Carton Size	580X480X375 mm
Material	ABS	Quantity	100 pcs
Connector type	SC/FC/LC/UPC/APC	Total Weight	12.1KG
Di ameter	0.9mm 2.0mm 3.0mm	Price/USD	

Please inform the connector type and packaging details before ordering



ABS FBT Splitter 1\*4

Dimensions	100X80X18mm	Packaging	Blister box SC/1.5M
Single Weight	97g	Carton Size	580X480X375 mm
Material	ABS	Quantity	100 pcs
Connector type	SC/FC/LC/UPC/APC	Total Weight	13.5KG
Di ameter	0.9mm 2.0mm 3.0mm	Price/RMB	

Please inform the connector type and packaging details before ordering



ABS FBT Splitter 1\*8

Dimensions	100X80X18mm	Packaging	Blister box SC/1.5M
Single Weight	130g	Carton Size	580X480X375 mm
Material	ABS	Quantity	50 pcs
Connector type	SC/FC/LC/UPC/APC	Total Weight	8.05KG
Di ameter	0.9mm 2.0mm 3.0mm	Price/RMB	

Please inform the connector type and packaging details before ordering



ABS FBT Splitter 1\*16

Dimensions	120X80X18mm	Packaging	Blister box SC/1.5M
Single Weight	230g	Carton Size	580X480X375 mm
Material	ABS	Quantity	50 pcs
Connector type	SC/FC/LC/UPC/APC	Total Weight	13.1KG
Di ameter	0.9mm 2.0mm 3.0mm	Price/USD	

Please inform the connector type and packaging details before ordering



ABS FBT Splitter 1\*64

Dimensions	120X800X18mm	Packaging	Blister box SC/1.5M
Single Weight	730g	Carton Size	580X480X375 mm
Material	ABS	Quantity	30 pcs
Connector type	SC/FC/LC/UPC/APC	Total Weight	23.5KG
Di ameter	0.9mm 2.0mm 3.0mm	Price/USD	

Please inform the connector type and packaging details before ordering



PVC Package



EVA Package



FC connector



2\*8 Optical Splitter



1\*32 Optical Splitter

# (Micro/Steel Tube/Mini) Optical Splitter



Micro Optical Splitter 1X2

		Sc valve bag	Blister packing box
Steel Tube	60X7X4mm	Inner Box Dimensions	28X25X21cm 28X25X21cm
Single Weight	SC.17g/FC.21g/No connector.10g	Carton size	59X52X23cm 28X25X21cm
Packaging	Blister Packing	Quantity	1000 pcs 200pcs
Connector Type	SC/FC/LC	Weight	23.8KG 6.2KG
Cable type	0.9mm/G657A1	Price/USD	


Please inform the connector type and packaging details before ordering



Micro Optical Splitter 1X4

		Sc valve bag	Blister packing box
Steel Tube	60X7X4mm	Inner Box Dimensions	28X25X21cm 28X25X21cm
Single Weight	SC.23g/FC.29g/No connector.13g	Carton size	59X52X23cm 59X52X23cm
Packaging	Blister Packing	Quantity	800 pcs 200pcs
Connector Type	SC/FC/LC	Weight	20.5KG 6.9KG
Cable type	0.9mm/G657A1	Price/USD	


Please inform the connector type and packaging details before ordering

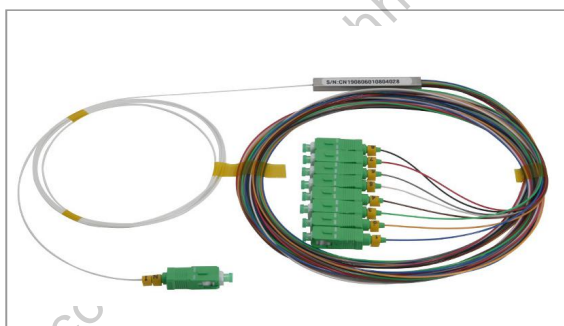

Micro Optical Splitter 1X8

		Sc valve bag	Blister packing box
Steel Tube	60X7X4mm	Inner Box Dimensions	28X25X21cm 28X25X21cm
Single Weight	SC.42g/FC.58g/No connector.20g	Carton size	59*52*23cm 59X52X23cm
Packaging	Blister Packing	Quantity	500 pcs 240 pcs
Connector Type	SC/FC/LC	Weight	21.2KG 18.3 KG
Cable type	0.9mm/G657A1	Price/USD	


Please inform the connector type and packaging details before ordering

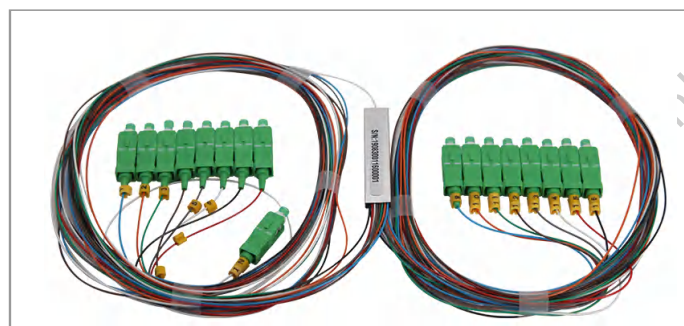

Micro Optical Splitter 1X16

		Sc valve bag	Blister packing box
Steel Tube	60X7X4mm	Inner Box Dimensions	28X25X21cm 28X25X21cm
Single Weight	SC.81g/FC.70g/No connector.40g	Carton size	59X52X23cm 59X52X23cm
Packaging	Blister Packing	Quantity	300 pcs 120pcs/4*Inner Box
Connector Type	SC/FC/LC	Weight	25.2KG 14.42KG
Cable type	0.9mm/G657A1	Price/USD	


Please inform the connector type and packaging details before ordering

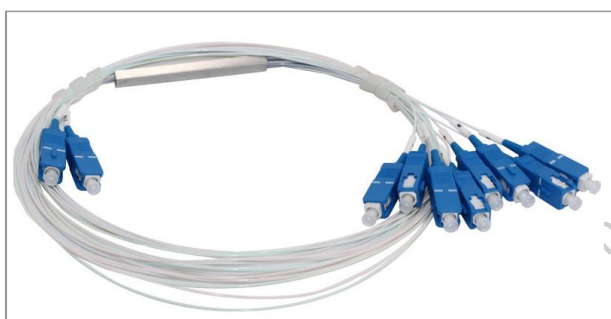

Steel Tube Splitter 2X8

		Sc valve bag	Blister packing box
Steel Tube	60X7X4mm	Inner Box Dimensions	28X25X21cm 28X25X21cm
Single Weight	SC.45g/FC.61g/No connector.20g	Carton size	59X52X23cm 59X52X23cm
Packaging	Blister Packing	Quantity	500 pcs 240 pcs
Connector Type	SC/FC/LC	Weight	22.3KG 19.1 KG
Diameter	0.9mm	Price/USD	

Please inform the connector type and packaging details before ordering

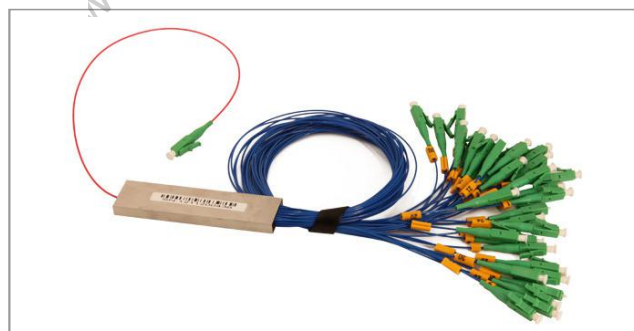


Steel Tube Splitter 1X64

Steel Tube	60X7X4mm	Inner Box Dimensions	28X25X21cm
Single Weight	356g	Carton size	59X52X23cm
Material	ABS	Quantity	50 pcs
Connector	SC/FC/LC UPC/APC	Weight	17.3KG
Diameter	0.9mm	Price/USD	

Please inform the connector type and packaging details before ordering


# FBT Optical Splitter

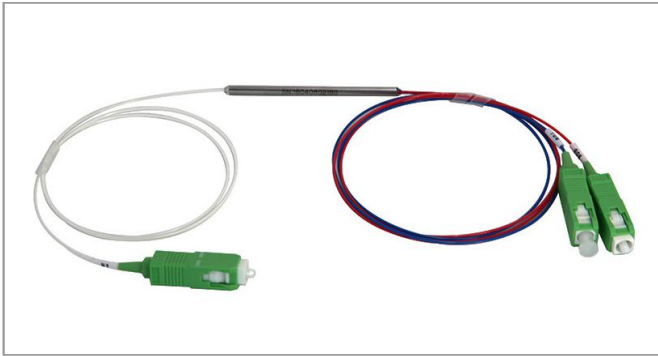

Steel Tube Splitter 1X2

Optical Type	③862D / ③867A	Inner Box	28.5X25X21cm
Single Weight	25g	Dimension	59X52X23cm
Material	ABS	Quantity	200 pcs
Connector	SC/FC/LC UPC/APC	Weight	7.1KG
Diameter	0.9mm 2.0mm 3.0mm	Price/USD	


Please inform the connector type and packaging details before ordering

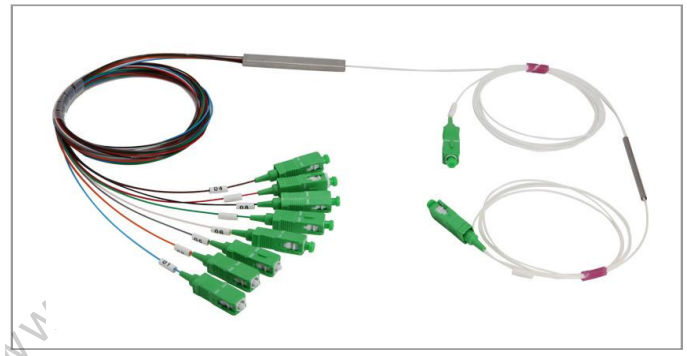

FBT+PLC MIX Optical Splitter

Tube dimension	30*74mm	Inner Box	28.5X25X21cm
Single Weight	68g	Dimension	59X52X23cm
Material	ABS	Quantity	120 pcs
Connector	SC/FC/LC/UPC/APC	Weight	10.2KG
Diameter	0.9mm	Price/USD	

Please inform the connector type and packaging details before ordering

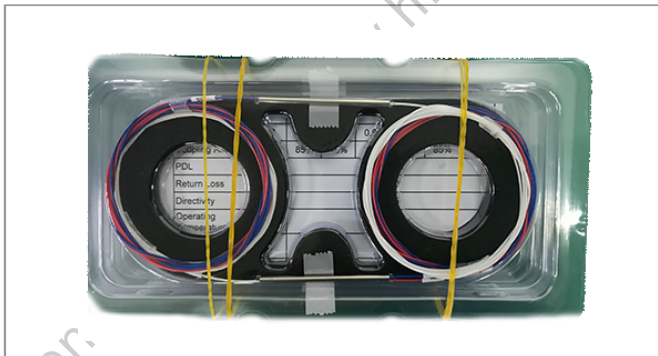

Without connect Splitter 1X2


Optical Type	③862D / ③867A	Inner Box	28.5X25X21cm
Single Weight	19g	Dimension	59X52X23cm
Material	ABS	Quantity	200 pcs
Connector	SC/FC/LC UPC/APC	Weight	7.1KG
Diameter	0.9mm 2.0mm 3.0mm	Price/USD	

Please inform the connector type and packaging details before ordering



ABS FBT Splitter 1 2

Dimensions	90X20X10mm	Packaging	Blister box SC/1.5M
Single Weight	45g	Carton Size	580X480X375 mm
Material	ABS	Quantity	100 pcs
Connector type	SC/FC/LC/UPC/APC	Total Weight	6.75KG
Diameter	0.9mm 2.0mm 3.0mm	Price/USD	

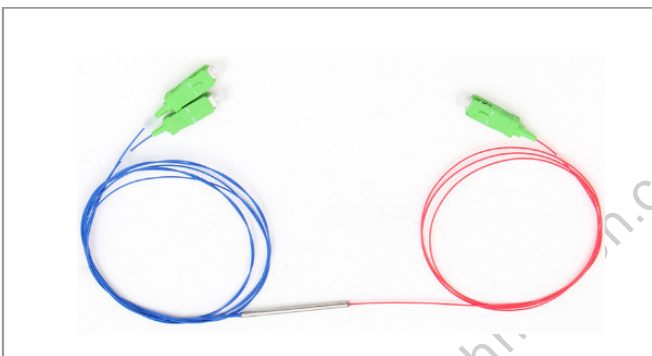

WDM 波分复用器

Optical Type	③862D / ③867A	Inner Box	28.5X25X21cm
Single Weight	19g	Dimension	59X52X23cm
Material	ABS	Quantity	200 pcs
Connector	SC/FC/LC UPC/APC	Weight	7.1KG
Diameter	0.9mm 2.0mm 3.0mm	Price/USD	



Steel Tube Splitter 1X2

Three Window Coupler Test Report

TESTING ENVIRONMENT: Temperature: 23°C±2°C, Relative Humidity: 50%±10%	E31415-TWC-1-2-50650	
Test Wavelength: nm	1270 / 1500/1480 / 1500/1510 / 1550	
Optical Path	3310nm	
	1550nm	
Insertion Loss	Ch1	Ch2
	3.54	3.55
Coupling Ratio	Ch1	Ch2
	3.43	3.47
PLR	49.93%	49.93%
	50.03%	49.79%



# PLC Splitter Parameter

Parameter	Specification								
Operating Wavelength (nm)	1260 ~ 1650								
Type	1x4	1x8	1x16	2x4	2x8	2x16	1x32	2x32	1x64
Insertion Loss (dB) Max. *	<7.3	<10.8	<13.8	<7.6	<11.2	<14.5	<17.2	<18.2	<20.5
Uniformity (dB) Max.*	<0.8	<1.0	<1.5	<1.0	<1.5	<2.0	<2.0	<2.5	<2.5
PDL(dB)Max.*	<0.2	<0.2	<0.3	<0.3	<0.3	<0.4	<0.3	<0.4	<0.3
Directivity (dB) Min *	55								
Return Loss (dB) Min *	55(50)								
Operating Temperature (°C)	-5~ +75								
Storage Temperature (°C)	-40 ~ +85								
Fiber length	1m or custom length								
Fiber Type	Corning SMF-28e fiber								
Connector Type	Custom specified								

## FBT Splitter Parameter

Wavelength (nm)	1310,1550 or other											
Rating parameters	P	A										
Additional loss (dB)	≦0.10 dB	≦0.15 dB										
Insertion loss (dB)	50/50	≦3.4 dB	≦3.6 dB									
	40/60	≦4.4/2.6 dB	≦4.7/2.8 dB									
	30/70	≦5.7/1.9 dB	≦6.0/2.0 dB									
	20/80	≦7.6/1.2 dB	≦8.0/1.3 dB									
	10/90	≦11.0/0.65 dB	≦11.5/0.8 dB									
	5/95	≦14.2/0.4 dB	≦14.8/0.5 dB									
	2/98	≦18.5/0.25 dB	≦19.0/0.35 dB									
	1/98	≦21.5/0.2 dB	≦22.0/0.3 dB									
Polarizationloss (dB)	≦0.10 dB	≦0.15 dB										
Directional (dB)	≧55											
Working temperature	-20~+70 (°C)											
注: :The customer designated												
WAYS	2	3	4	5	6	7	8	9	10	11	12	16
Insertion loss	0.2	0.3	0.4	0.45	0.5	0.55	0.6	0.7	0.8	0.9	1.0	1.2

### Mini Steel tube package

规格	1X2	1X4	1X8	1X16	1X32	1X64	2X2	2X4	2X8	2X16	2X32	2X64
长(mm)	50	55/60	60	80	100	50	60	80	100	100		
宽(mm)	4	7	12	20	40	4	7	12	20	40		
高(mm)	4	4	4	6	6	4	4	4	6	6		

### ABS box Package

规格	1X2	1X4	1X8	1X16	1X32	1X64	2X2	2X4	2X8	2X16	2X32	2X64
长(mm)		100		120	140		100		120		140	
宽(mm)		80		80	114		80		80		114	
高(mm)		10		18	18		10		18		18	

### Cassette Package

规格	1X2	1X4	1X8	1X16	1X32	1X64	2X2	2X4	2X8	2X16	2X32	2X64
长(mm)		130		130	130	130		130		130	130	130
宽(mm)		100		100	100	100		100		100	100	100
高(mm)		25		50	102	206		25		50	102	206

### Splice tray Package


规格	1X2	1X4	1X8	1X16	1X32	1X64	2X2	2X4	2X8	2X16	2X32	2X64
长(mm)		302		302	302		302		302		302	302
宽(mm)		180		180	180		180		180		180	180
高(mm)		25		50	100		25		50		100	

### Rack Package


规格	1X2	1X4	1X8	1X16	1X32	1X64	2X2	2X4	2X8	2X16	2X32	2X64
长(mm)		483				/		483				/
宽(mm)		200				/		200				/
高(mm)		44.5				/		44.5				/

# PATCH CORD

## 跳线&尾纤 Patch Cord & Pigtail Connectors

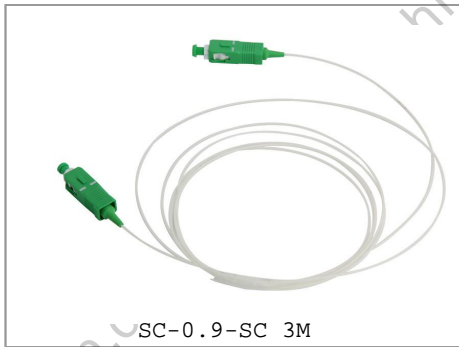

Optical Type	G652D/G657A	Inner Box	28.5X25X21cm
Diameter	0.9mm	Inner Quantity	300pcs(1pcs/Bag)
Single Weight	7g	Dimension	59X52X23cm
Length	3m/customized	Quantity	1200pcs
Connector	SC/FC/LC	Weight	15.3 KG
Furrel Face	UPC/APC	Price/USD	

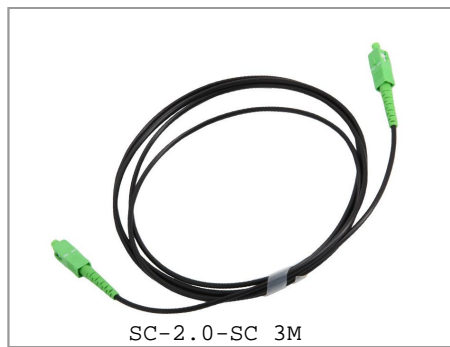


Optical Type	G652D/G657A	Inner Box	28.5X25X21cm
Diameter	2mm	Inner Quantity	200pcs(10pcs/Bag)
Single Weight	15g	Dimension	59X52X23cm
Length	3m/customized	Quantity	800pcs
Connector	SC/FC/LC	Weight	18 KG
Furrel Face	UPC/APC	Price/USD	



Optical Type	G652D/G657A	Inner Box	28.5X25X21cm
Diameter	3mm	Inner Quantity	125pcs(1pcs/Bag)
Single Weight	23g	Dimension	59X52X23cm
Length	3m/customized	Quantity	500pcs
Connector	SC/FC/LC	Weight	16 KG
Furrel Face	UPC/APC	Price/USD	

Note: Please specify connector type, cable length and packing requirements when ordering. The default packaging of the product is 10 pieces/small bag. 4\*Inner Box(0.18KG)/Outer box (59\*52\*23CM, 1.38KG) Or 8\*Inner Box/Outer box (59\*52\*46CM, 1.88KG)

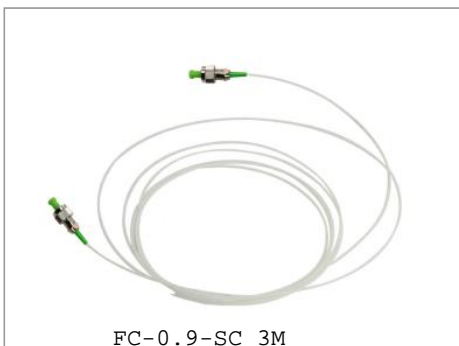

Optical Type	G652D/G657A	Inner Box	28.5X25X21cm
Diameter	0.9mm	Inner Quantity	300pcs(1pcs/Bag)
Single Weight	8.4g	Dimension	59X52X23cm
Length	3m/customized	Quantity	1200pcs
Connector	SC/FC/LC	Weight	17 KG
Furrel Face	UPC/APC	Price/USD	




Optical Type	G652D/G657A	Inner Box	28.5X25X21cm
Diameter	0.9mm	Inner Quantity	200pcs(10pcs/Bag)
Single Weight	20g	Dimension	59X52X23cm
Length	3m/customized	Quantity	800pcs
Connector	SC/FC/LC	Weight	22 KG
Furrel Face	UPC/APC	Price/USD	



Optical Type	G652D/G657A	Inner Box	28.5X25X21cm
Diameter	0.9mm	Inner Quantity	125pcs(1pcs/Bag)
Single Weight	23g	Dimension	59X52X23cm
Length	3m/customized	Quantity	500pcs
Connector	SC/FC/LC	Weight	19 KG
Furrel Face	UPC/APC	Price/USD	

# 光纤跳线 PATCH CORD

www.hhdz-er

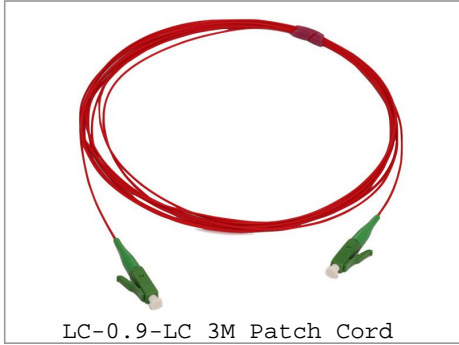


LC-0.9-LC 3M Patch Cord

Optical Type	G652D/G657A	Inner Box	28.5X25X21cm
Diameter	0.9mm	Inner Quantity	300pcs(1pcs/Bag)
Single Weight	3.9g	Dimension	59X52X46cm
Length	3m/customized	Quantity	2400pcs
Connector	SC/FC/LC	Weight	23KG
Furrel Face	UPC/APC	Price/USD	



LC-2.0-LC 3M Patch Cord

Optical Type	G652D/G657A	Inner Box	28.5X25X21cm
Diameter	0.9mm	Inner Quantity	200pcs(1pcs/Bag)
Single Weight	11.2g	Dimension	59X52X23cm
Length	3m/customized	Quantity	800pcs
Connector	SC/FC/LC	Weight	15 KG
Furrel Face	UPC/APC	Price/USD	

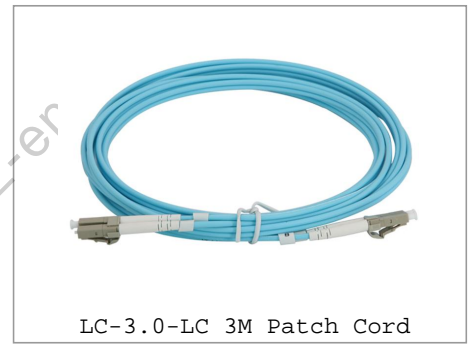

LC-3.0-LC 3M Patch Cord


Optical Type	G652D/G657A	Inner Box	28.5X25X21cm
Diameter	0.9mm	Inner Quantity	100pcs(1pcs/Bag)
Single Weight	19.2g	Dimension	59X52X46cm
Length	3m/customized	Quantity	800pcs
Connector	SC/FC/LC	Weight	23 KG
Furrel Face	UPC/APC	Price/USD	

Note: Please specify connector type, cable length and packing requirements when ordering. The default packaging of the product is 10 pieces/ small bag. 4\*Inner Box (0.18KG) /Outer box (59\*52\*23CM, 1.38KG) Or 8\*Inner Box /Outer box (59\*52\*46CM, 1.88KG)




4 Cores Waterproof Outdoor Optical Fiber

Optical Type	G652D/G657A	Packaging	Blister Packaging
Diameter	0.9mm	Inner Quantity	300pcs(1pcs/Bag)
Single Weight	3.9g	Dimension	59X52X46cm
Length	3m/customized	Quantity	1200pcs
Connector	SC/FC/LC	Weight	23KG
Furrel Face	UPC/APC	Price/USD	

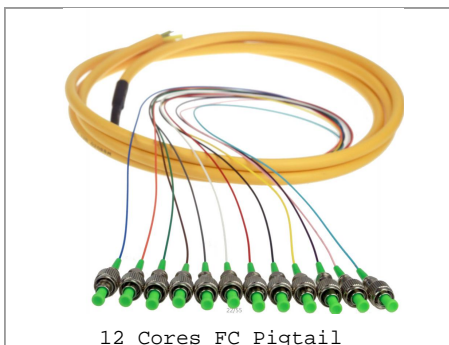

12 Cores FC Pigtail


Optical Type	G652D/G657A	Packaging	Blister Packaging
Diameter	0.9mm	Inner Quantity	200pcs(1pcs/Bag)
Single Weight	11.2g	Dimension	59X52X23cm
Length	3m/customized	Quantity	200pcs
Connector	SC/FC/LC	Weight	15 KG
Furrel Face	UPC/APC	Price/USD	

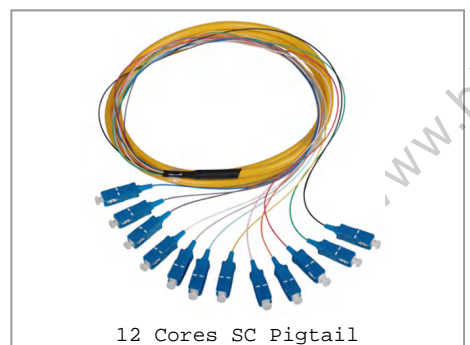

12 Cores SC Pigtail


Optical Type	G652D/G657A	Packaging	Blister Packaging
Diameter	0.9mm	Inner Quantity	100pcs(1pcs/Bag)
Single Weight	19.2g	Dimension	59X52X46cm
Length	3m/customized	Quantity	200pcs
Connector	SC/FC/LC	Weight	16 KG
Furrel Face	UPC/APC	Price/USD	

Note: Please specify connector type, cable length and packing requirements when ordering. The default packaging of the product is 10 pieces/ small bag. 4\*Inner Box (0.18KG) /Outer box (59\*52\*23CM, 1.38KG) Or 8\*Inner Box /Outer box (59\*52\*46CM, 1.88KG)

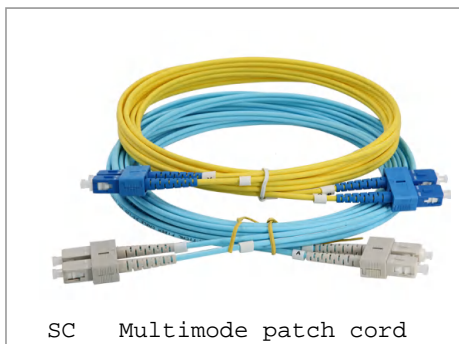


SC Multimode patch cord

Optical Type	G652D/G657A	Packaging	Blister Packaging
Diameter	3mm	Inner Quantity	300pcs(1pcs/Bag)
Single Weight	56g	Dimension	59X52X46cm
Length	3m/customized	Quantity	1200pcs
Connector		Weight	23KG
Furrel Face	UPC/APC	Price/USD	

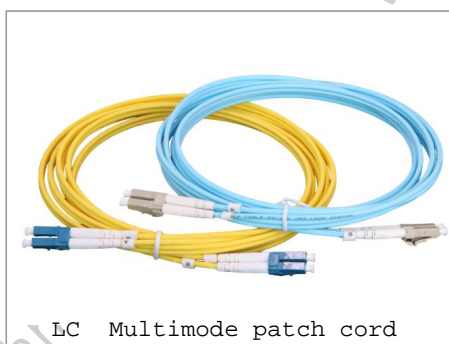

LC Multimode patch cord

Optical Type	G652D/G657A	Packaging	Blister Packaging
Diameter	0.9mm	Inner Quantity	200pcs(1pcs/Bag)
Single Weight	11.2g	Dimension	59X52X23cm
Length	3m/customized	Quantity	200pcs
Connector		Weight	15 KG
Furrel Face	UPC/APC	Price/USD	

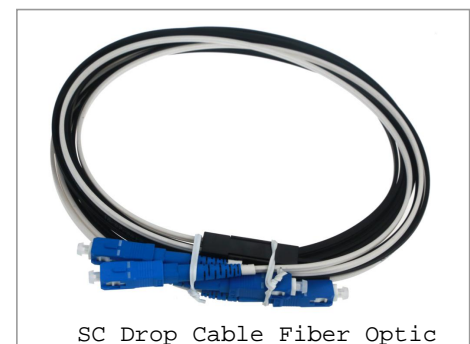


SC Drop Cable Fiber Optic

Optical Type	G652D/G657A	Packaging	Blister Packaging
Diameter	0.9mm	Inner Quantity	100pcs(1pcs/Bag)
Single Weight	19.2g	Dimension	59X52X46cm
Length	3m/customized	Quantity	200pcs
Connector	SC/FC/LC	Weight	16 KG
Furrel Face	UPC/APC	Price/USD	



# Optical Fiber Splice Closure

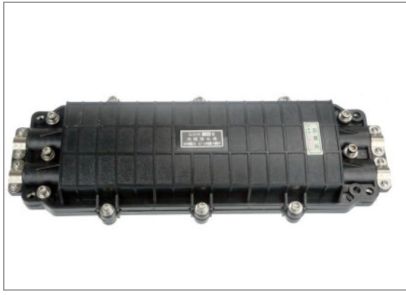

2 in 2 out horizontal type

Dimensions	460*175*115	Inner Box	465*180*120
Weight	1.7KG	Outer Box	630*500*400
Material	PPR	Capacity	10PCS
Number of cores	24cores	Weight of Carton	20.7KG
Max number of cores	72cores	<b>PRICE/USD</b>	



2 in 2 out dome type

Dimensions	435*195	Inner Box	405*185*190
Weight	2050g	Outer Box	580*475*400
Material	PPR	Capacity	6PCS
Number of cores	24cores	Weight of Carton	13.5KG
Max number of cores	144cores	<b>PRICE/USD</b>	



2 in 2 out horizontal type

Dimensions	460*175*115	Inner Box	465*180*120
Weight	1.7KG	Outer Box	630*500*400
Material	PPR	Capacity	10PCS
Number of cores	24cores	Weight of Carton	20.7KG
Max number of cores	72cores	<b>PRICE/USD</b>	



2 in 2 out horizontal type

Dimensions	430*135mm	Inner Box	440*180*140
Weight	1.9KG	Outer Box	590*460*400
Material	PPR	Capacity	6PCS
Number of cores	24 cores	Weight of Carton	14KG
Max number of cores	72 cores	<b>PRICE/USD</b>	

Note: Barrel mechanism



3 in 3 out Screw type

Dimensions	425*180*110mm	Inner Box	465*175*120mm
Weight	2600g(including carton)	Outer Box	620*480*380mm
Material	PC	Capacity	10PCS
Number of cores	24 cores	Weight of Carton	27KG
Max number of cores	144 cores	<b>PRICE/USD</b>	

Note: plastic trestle



3 in 3 out Plate type

Dimensions	435*195	Inner Box	450*220*125mm
Weight	2050g	Outer Box	655*470*455mm
Material	PPR	Capacity	10PCS
Number of cores	24cores	Weight of Carton	29KG
Max number of cores	144cores	<b>PRICE/USD</b>	

Note: ordinary type & PC plastic trestle

# 光缆接续盒



4 in 4 out horizontal type

Dimension	420*175*110mm	Inner Box	430*180*120mm
Single Weight	2000g(Contains the carton)	Outer Box	640*390*445mm
Material	PPR	Capacity	10 pcs
Number of cores	24 cores	Weight	21 kg
Max Number Of Cores	72 cores	PRICE/USD	



4 in 4 out Plate Type(micro card)

Dimension	410*200*100mm	Inner Box	430*215*110mm
Single Weight	2250g(Contains the carton)	Outer Box	560*440*410mm
Material	ABS	Capacity	10 pcs
Number of cores	24 cores	Weight	23.5kg
Max Number Of Cores	144 cores	PRICE/USD	



4 in 4 out horizontal type

Dimension	455*210*120mm	Inner Box	455*220*125mm
Single Weight	2700g(Contains the carton)	Outer Box	545*470*465mm
Material	ABS	Capacity	8 pcs
Number of cores	24 cores	Weight	23 kg
Max Number Of Cores	144 cores	PRICE/USD	



4 in 4 out dome type

Dimension	435*195mm	Inner Box	405*185*190mm
Single Weight	2100g(Contains the carton)	Outer Box	580*475*400mm
Material	PPR ABS	Capacity	
Number of cores	24 cores	Weight	
Max Number Of Cores	144 cores	PRICE/USD	

## Installation method

1.Remove cable sheath(If it has, remove shielding and armor),Then remove each wrapping layer to expose the loose sleeve. For specific method, please follow our recommended standard procedure and prepare the length of 3m

2.Clean loose sleeve and strengthen core sheath with detergent

### Optical fiber installation

1.Select the sealing ring with the minimum inner diameter according to the outer diameter of the optical cable, and wrap the two sealing rings on the optical cable

2.Put the cable into the corresponding hole

3.Connection shielding and grounding

4.Wrap self-adhesive sealing tape between the two sealing rings so that the sealing belt is wound flush with the outer diameter of the sealing ring to form a cable sealing ring

5.Press the cable sealing end into the hole

6.Pass the throat hoop through the cable reinforcing rib fixing seat and cable core bracket, fix the cable on the bottom seat of the connector box, tighten the throat hoop screw until the throat hoop tightens

7.In the cable on the nylon ribbon, cut the remaining long

8.For other unused optical cable holes, please use a plug to seal them. The plug should also be wrapped with sealing tape. The requirements according to 5.2.4

9.Wrap the reinforcing member around the countersunk head screw on the base of the weld plate and press it tight

# FTTH TO US

# FTTH分纤箱系列



12cores/16cores/24cores Distribution Box

Dimension	320×240×100mm	Inner Box	360×105×290mm
Single Weight	1310g(Contains the cartons)	Outer Box	540×375×560mm
Materail	ABS PC metal	Capacity	10 pcs
Weight	15kg	Price/USD	


Note:Installation accessories including hanging wall, optional hanging rod accessories.words/Logo/can be customized.



12cores/16cores/24cores Distribution Box

Dimension	335*270*100mm	Inner Box	360×105×290mm
Single Weight	1520g(Contains the cartons)	Outer Box	540×375×560mm
Materail	ABS PC metal	Capacity	10 pcs
Weight	16KG	Price/USD	

Note:Installation accessories including hanging wall, optional hanging rod accessories.words/Logo/can be customized.

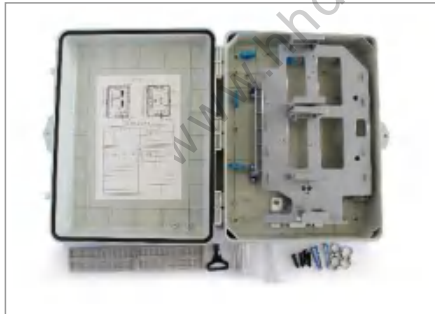

32cores/48cores Distribution Box(Screw type/Key type)

Dimension	420*320*130mm	Inner Box	425*365*133mm
Single Weight	2500g(Contains the cartons)	Outer Box	825*450*390mm
Materail	ABS PC metal	Capacity	6 pcs
Weight	16.5KG	Price/USD	

Note:Installation accessories including hanging wall, optional hanging rod accessories.words/Logo/can be customized.



12cores/16cores/24cores Distribution Box(Screw type/Key type)

Dimension	340*310*130mm	Inner Box	350*320*145mm
Single Weight	1750g(Contains the cartons)	Outer Box	650*720*365mm
Materail	ABS PC metal	Capacity	10 pcs
Weight	19.5KG	Price/USD	

Note:Installation accessories including hanging wall, optional hanging rod accessories.words/Logo/can be customized.



32cores/48cores/64cores Distribution Box

Dimension	430*355*165mm	Inner Box	435*355*180mm
Single Weight	2510g(Contains the cartons)	Outer Box	690*450*460mm
Materail	ABS PC metal	Capacity	4 pcs
Weight	11.5KG	Price/USD	

Note:Installation accessories including hanging wall, optional hanging rod accessories.words/Logo/can be customized.



16cores Distribution Box Customized

Dimension	295*245*90mm	Inner Box	300*260*105mm
SingleWeight	1320g(Contains the cartons)	Outer Box	540*540*330mm
Materail	ABS PC metal	Capacity	4 pcs
Weight	14.5KG	Price/USD	

Note:Installation accessories including hanging wall, optional hanging rod accessories.words/Logo/can be customized.

## Installation method

1.Range of application:China Mobile;China Unicom;China Tietong;China Telecom,BTN;FFTH;FTTB;FTTX;FTTP 2.Range of Installation:Wall mounting type:corridor&outdoor&Indoor;Pole type fiber distribution box:optical fiber access network distribution cable and household cable junction(Distribution box adopts wall mounting type or derrick type),suitable for indoor and outdoor;Use SC optical adapter and fast connector to connect Armored cable and schedule between the optical cable and the home optical cable

# FTTH分纤箱系列



16 Cores Double Open Distribution Box

Deminsion	350*210*125mm	Inner Box	* * mm
Single Weight	1900g	Outer Box	620*515*335mm
Material	ABS	Capacity	
Weight	23 KG	PRICE/USD	

Note:Installation accessories including hanging wall, optional hanging rod accessories.words/Logo/can be customized.



16 Cores Export Type Fiber Distribution Box A

Deminsion	290*220*80mm	Inner Box	310*230*100mm
Single Weight	1258g	Outer Box	500*470*300mm
Material	ABS PC metal	Capacity	10 PCS
Weight	KG	PRICE/USD	

Note:Installation accessories including hanging wall, optional hanging rod accessories.words/Logo/can be customized.



16 Cores Export Type Fiber Distribution Box B

Deminsion	290*220*80mm	Inner Box	310*230*100mm
Single Weight	1260g	Outer Box	500*470*300mm
Material	ABS	Capacity	10 PCS
Weight	19 KG	PRICE/USD	

Note:Installation accessories including hanging wall, optional hanging rod accessories.words/Logo/can be customized.



16 Cores Export Type Fiber Distribution Box C

Deminsion	290*200*70mm	Inner Box	310*230*100mm
Single Weight	1020g	Outer Box	500*470*300mm
Material	ABS	Capacity	10 PCS
Weight	16 KG	PRICE/USD	


Note:Installation accessories including hanging wall, optional hanging rod accessories.words/Logo/can be customized.



16 Cores Export Type Fiber Distribution Box D

Deminsion	320*250*100mm	Inner Box	310*230*100mm
Single Weight	1350g	Outer Box	500*470*300mm
Material	ABS	Capacity	10 PCS
Weight	20 KG	PRICE/USD	

Note:Installation accessories including hanging wall, optional hanging rod accessories.words/Logo/can be customized.

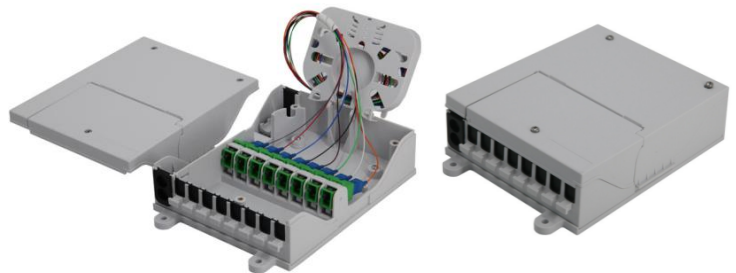


8 Cores Export Type Fiber Distribution Box

Deminsion	195*125*45mm	Inner Box	195*125*45mm
Single Weight	250g	Outer Box	540*470*470mm
Material	ABS	Capacity	60 PCS
Weight	18.3KG	PRICE/USD	

Note:Installation accessories including hanging wall, optional hanging rod accessories.words/Logo/can be customized.



# 光纤面板系列

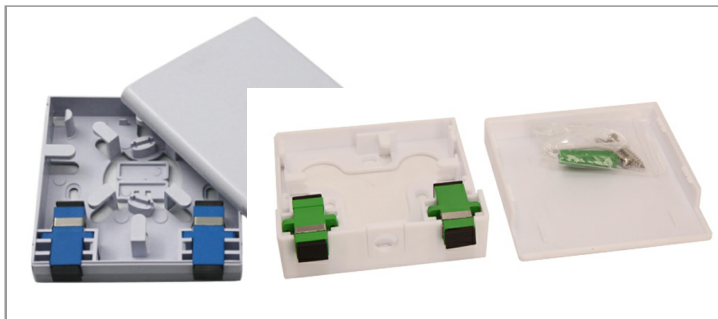

Optical Fiber Panel A

产品尺寸	86X86X20 mm	内箱尺寸	
单个重量	46g	外箱尺寸	530X470 X550mm
材 质	ABS	每箱容量	500 PCS
每箱重量	25KG	价格/RMB	



Optical Fiber Panel B

产品尺寸	205X150X40 mm	内箱尺寸	可选配
单个重量	46g	外箱尺寸	530X470 X550mm
材 质	ABS	每箱容量	300只
每箱重量	25KG	价格/RMB	



Optical Fiber Panel C

Deminsion	132 X88X32 mm	Inner Box	
Single Weight	61g	Outer Box	530X470 X550mm
Material	ABS	Capacity	400 PCS
Weight	26KG	PRICE/USD	

NOTE:Words/Logo/can be customized.



Optical Fiber Panel D

Deminsion	115X95X20mm	Inner Box	
Single Weight	79g	Outer Box	530X470 X550mm
Material	ABS	Capacity	400 PCS
Weight	28.5KG	PRICE/USD	

NOTE:Words/Logo/can be customized.



Optical Fiber Panel E

Deminsion	86X86X 29mm	Inner Box	
Single Weight	40g	Outer Box	505X450X 450mm
Material	ABS	Capacity	500 PCS
Weight	22 KG	PRICE/USD	

NOTE:Words/Logo/can be customized.



Optical Fiber Panel F

Deminsion	205X150X40mm	Inner Box	210X135X45mm
Single Weight	225	Outer Box	430X580X290mm
Material	ABS	Capacity	10 PCS
Weight	15.2KG	PRICE/USD	

NOTE:Words/Logo/can be customized.

# Fast Connector Series



Fast connector SC/APC

Deminsion	55mm/57mm	Inner Box	200*200*75mm
Single Weight	3g	Outer Box	395*350*215mm
Material	ABS	Capacity	1000pcs
Weight	6KG	PRICE/USD	



Fast connector SC/UPC

Deminsion	55mm/57mm	Inner Box	200*200*75mm
Single Weight	3g	Outer Box	395*350*215mm
Material	ABS	Capacity	1000pcs
Weight	6KG	PRICE/USD	



Fast connector SC-C

Deminsion	55mm/57mm	Inner Box	200*200*75mm
Single Weight	3g	Outer Box	395*350*215mm
Material	ABS	Capacity	1000pcs
Weight	6KG	PRICE/USD	



Fast connector FC

Deminsion	55mm/57mm	Inner Box	200*200*75mm
Single Weight	3g	Outer Box	395*350*215mm
Material	ABS	Capacity	1000pcs
Weight	6.2KG	PRICE/USD	



connector Box

Deminsion	55mm/57mm	Inner Box	200*200*75mm
Single Weight	3g	Outer Box	395*350*215mm
Material	ABS PC metal	Capacity	
Weight	KG	PRICE/USD	



Fast connector SC/UPC

Deminsion	55mm/57mm	Inner Box	200*200*75mm
Single Weight	3g	Outer Box	395*350*215mm
Material	ABS PC metal	Capacity	
Weight	KG	PRICE/USD	



# Optical Cable Junction Box Series



96 cores optical cable junction box

Dimension	445X275X780mm	Number of Plates	8 pcs
Each carton weight	40KG Without base	Splice Tray	6 pcs
Material	SMC	PRICE/USD	
cold-rolled sheet: 1030X550X310, flange:1.2mm			

Note: Installation accessories including hanging wall, optional hanging rod accessories.words/Logo/can be customized.



144 cores optical cable junction box

Dimension	550X320X1030mm	Number of Plates	12 pcs
Each carton weight	52KG	Splice Tray	6 pcs
Material	SMC	PRICE/USD	
cold-rolled sheet: 1450X750X320, flange:1.2mm			

Note: Installation accessories including hanging wall, optional hanging rod accessories.words/Logo/can be customized.



288 cores optical cable junction box

Dimension	750X320X1350mm	Number of Plates	24 pcs
Each carton weight	63KG	Splice Tray	12 pcs
Material	SMC	PRICE/USD	
cold-rolled sheet: 1450X750X320, flange:1.2mm			


Note: Installation accessories including hanging wall, optional hanging rod accessories.words/Logo/can be customized.




576 cores optical cable junction box

Dimension	750X540X1450mm	Number of Plates	48 pcs
Each carton weight	1.27KG	Splice Tray	24 pcs
Material	SMC	PRICE/USD	
cold-rolled sheet: 1450X750X520, flange:1.2mm			


Note: Installation accessories including hanging wall, optional hanging rod accessories.words/Logo/can be customized.

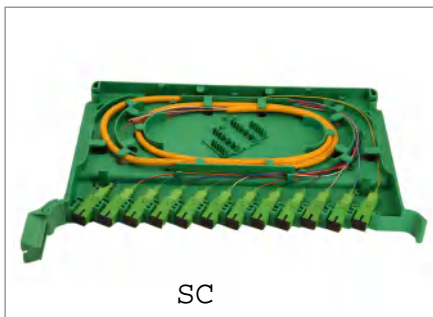



SC

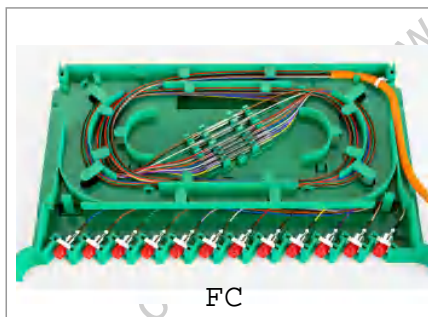

FC

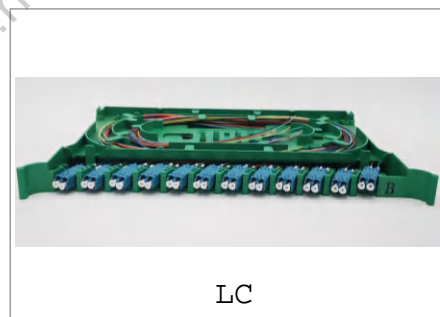

LC

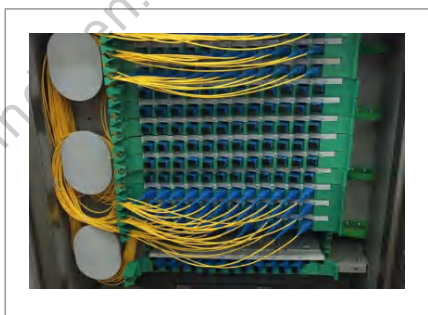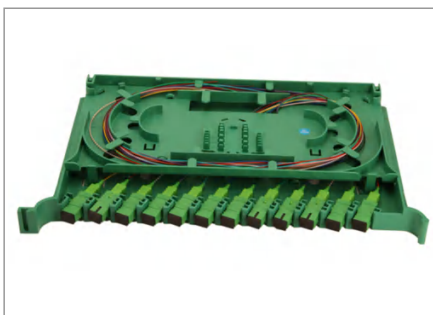

免跳接型托盘

Note: please specify adapter type and integrated tray connection type before ordering.

# ODF Fiber Optic Distribution Frame



Model Number	Dimension	Max Cores
ODF576	2000X800X400mm	576 cores
ODF648	2200X800X400mm	648 cores
ODF864	2600X800X400mm	864 cores

Note: words/Logo/can be customized.



NO.1 ODF Fiber Optic Distribution Frame 12 Cores

Dimension	430×290×50mm	Inner Box	505×340×110mm
Single Weight	3900g(including cartons)	Outer Box	515×360×560mm
Material	Galvanized sheet blister	Capacity	5pcs
Thickness Of Plates	1.2mm	Weight	21KG



NO.2 ODF Fiber Optic Distribution Frame 24 Cores

Dimension	430×290×70mm	Inner Box	505×340×125mm
Single Weight	4570g(including cartons)	Outer Box	515×360×670mm
Material	Galvanized sheet blister	Capacity	5pcs
Thickness Of Plates	1.2mm	Weight	24.5KG



NO.3 ODF Fiber Optic Distribution Frame 48 Cores

Deminsion	430×290×140mm	Inner Box	505×340×195mm
Single Weight	6500g(including cartons)	Outer Box	515×360×615mm
Material	Galvanized sheet blister	Capacity	3pcs
Thickness Of Plates		Weight	21KG



NO.4 ODF Fiber Optic Distribution Frame 72 Cores

Dimension	430×290×180mm	Inner Box	505×340×235mm
Single Weight	7000g(including cartons)	Outer Box	515×360×495mm
Material	Galvanized sheet blister	Capacity	2pcs
Thickness Of Plates		Weight	15.5KG



NO.5 ODF Fiber Optic Distribution Frame 96 Cores

Dimension	430×290×235mm	Inner Box	505×340×290mm
Single Weight	9400g(including cartons)	Outer Box	515×360×605mm
Material	Galvanized sheet blister	Capacity	2pcs
Thickness Of Plates	1.2mm	Weight	20.5KG

Note: including Integrated tray, words/Logo/can be customized.



NO.6 ODF Fiber Optic Distribution Frame 144 Cores

Dimension	430×290×345mm	Inner Box	505×340×400mm
Single Weight	12.8KG(including cartons)	Outer Box	515×360×430mm
Material	Galvanized sheet blister	Capacity	1pcs
Thickness Of Plates	1.2mm	Weight	14KG

Note: including Integrated tray, words/Logo/can be customized.

# Optical Fiber Terminal Box Series



4/8/16 Cores Terminal Box

Dimension	260×135×40mm	Inner Box	260×140×45mm
Single Weight	770g(including cartons)	Outer Box	455×290×590mm
Material	Plastical Galvanized Tray	Capacity	40pcs
thickness of tray	1.0mm	Weight	32KG
PRICE/USD			



4/8 Cores Terminal Box

Dimension	200×140×45mm	Inner Box	210×145×50mm
Single Weight	830g(including cartons)	Outer Box	455×300×580mm
Material	Plastical Galvanized Tray	Capacity	40pcs
thickness of tray	1.0mm	Weight	34.5KG
PRICE/USD			



12-24 Cores Terminal Box A type

Dimension	430×200×45mm	Inner Box	450×210×50mm
Single Weight	1720g(including cartons)	Outer Box	470×240×580mm
Material	Plastical Galvanized Tray	Capacity	10pcs
thickness of tray	1.0mm	Weight	18.5KG
PRICE/USD			



48 Cores Terminal Box A type

Dimension	430×200×90mm	Inner Box	450×210×95mm
Single Weight	2300g(including cartons)	Outer Box	470×240×500mm
Material	Plastical Galvanized Tray	Capacity	5pcs
thickness of tray	1.0mm	Weight	13KG
PRICE/USD			



12-24 Cores Terminal Box B type

Dimension	440×355×45mm	Inner Box	470×375×52mm
Single Weight	480g(including cartons)	Outer Box	490×400×275mm
Material	Plastical Galvanized Tray	Capacity	10pcs
thickness of tray	1.0mm	Weight	21KG
PRICE/USD			



48 Cores Terminal Box B type

Dimension	430×325×45mm	Inner Box	470×370×95mm
Single Weight	535g(including cartons)	Outer Box	495×395×510mm
Material	Plastical Galvanized Tray	Capacity	5pcs
thickness of tray	1.0mm	Weight	26KG
PRICE/USD			

# 1U机架式终端



机架式终端A型

Dimension	360X2510X50mm	Inner Box	370X260X55mm
Single Weight	2950g	Outer Box	580X270X480mm
Material	Plastical Galvanized Tray	Capacity	8pcs
thickness of tray	1.2	Weight	27KG

PRICE/USD  
Note:words/Logo/can be customized.



机架式终端B型

Dimension	480X280X44mm	Inner Box	500X310X55mm
Single Weight	1700g/4100	Outer Box	520X350X480mm
Material	Plastical Galvanized Tray	Capacity	8pcs
thickness of tray	1.0	Weight	15KG/35KG

PRICE/USD  
Note:words/Logo/can be customized.



机架式终端C型

Dimension	480X325X44mm	Inner Box	500X330X55mm
Single Weight	1390g	Outer Box	520X350X480mm
Material	aluminium alloy	Capacity	10pcs
thickness of tray	1.2	Weight	12KG

PRICE/USD  
Note:words/Logo/can be customized.



机架式终端D型

Dimension	480X315X44mm	Inner Box	500X330X55mm
Single Weight	1190g	Outer Box	520X350X480mm
Material	aluminium alloy	Capacity	5pcs
thickness of tray	1.0	Weight	11KG

PRICE/USD  
Note:words/Logo/can be customized.

备注：可印字，印标志，可定制logo。





机架式终端E型

Dimension	480X290X44mm	Inner Box	500X330X55mm
Single Weight	3050g	Outer Box	520X350X480mm
Material	铝合金	Capacity	8只
Thickness of tray	1.2	Weight	12KG

价格/RMB


备注：可印字，印标志，可定制logo。

# FTTH Drop Cable

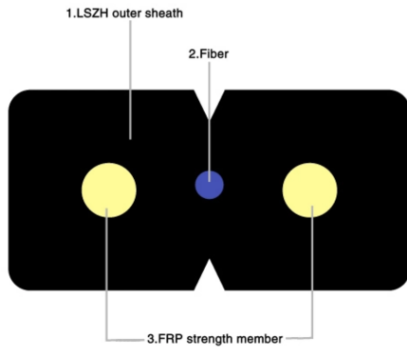


Model	GJYXFCH 1 core	Outer Sheath	PVC
Optical Attenuation	1310:0.26 1550:0.17	Temperature Characteristic	-20%~60%
Limit Of Tensile	long-term:800 short-term:500	Compressive Strength	allowed to pull
Reinforcement	FRP	Piping Laying Method	Built on stilts/ Pipeline
Limit Of Tensile	1000KM/18KG	Optical Fiber Material	The Stern Chi/Fofc

PRICE/USD  
Note:words/Logo/can be customized.

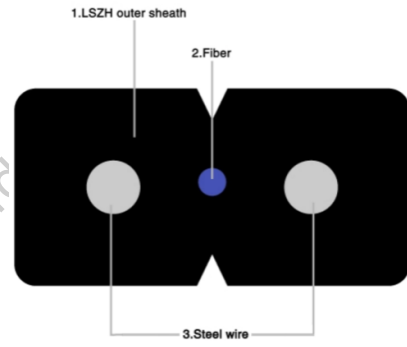


Model	GJYXFCH 1 core	Outer Sheath	PVC
Optical Attenuation	1310:0.26 1550:0.17	Temperature Characteristic	-20%~60%
Limit Of Tensile	long-term:800 short-term:500	Compressive Strength	allowed to pull
Reinforcement	Phosphating steel wire	Piping Laying Method	Built on stilts/ Pipeline
Limit Of Tensile	1000KM/20KG	Optical Fiber Material	The Stern Chi/Fofc

PRICE/USD  
Note:words/Logo/can be customized.

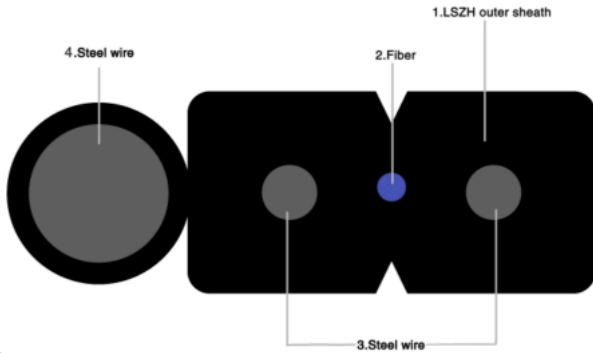


Model	GJYXFCH 4 cores	Outer Sheath	PVC
Optical Attenuation	1310:0.26 1550:0.17	Temperature Characteristic	-20%~60%
Limit Of Tensile	long-term:800 short-term:500	Compressive Strength	allowed to pull
Reinforcement	Phosphating steel wire	Piping Laying Method	Built on stilts/ Pipeline
Limit Of Tensile	1000KM/29KG	Optical Fiber Material	The Stern Chi/Fofc

PRICE/USD  
Note:words/Logo/can be customized.

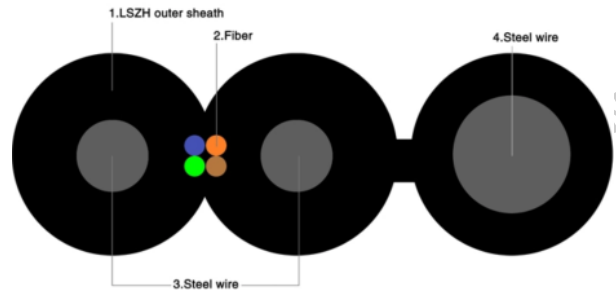


Model	GJYXFCH 4 cores	Outer Sheath	PVC
Optical Attenuation	1310:0.26 1550:0.17	Temperature Characteristic	-20%~60%
Limit Of Tensile	long-term:800 short-term:500	Compressive Strength	allowed to pull
Reinforcement	Phosphating steel wire	Piping Laying Method	Built on stilts/ Pipeline
Limit Of Tensile	1000KM/29KG	Optical Fiber Material	The Stern Chi/Fofc

PRICE/USD  
Note:words/Logo/can be customized.

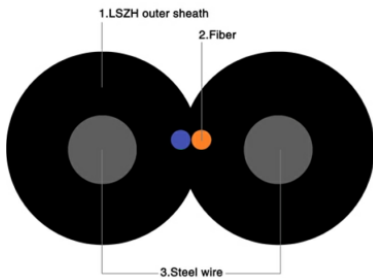

Model	GJYXFCH 2 cores	Outer Sheath	PVC
Optical Attenuation	1310:0.26 1550:0.17	Temperature Characteristic	-20%~60%
Limit Of Tensile	long-term:800 short-term:500	Compressive Strength	allowed to pull
Reinforcement	Phosphating steel wire	Piping Laying Method	Built on stilts/ Pipeline
Limit Of Tensile	1000KM/23KG	Optical Fiber Material	The Stern Chi/Fofc

PRICE/USD  
Note:words/Logo/can be customized.

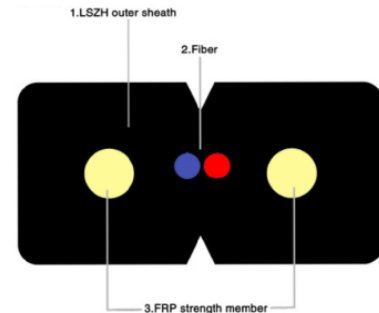

Model	GJYXFCH 2 cores	Outer Sheath	PVC
Optical Attenuation	1310:0.26 1550:0.17	Temperature Characteristic	-20%~60%
Limit Of Tensile	long-term:800 short-term:500	Compressive Strength	allowed to pull
Reinforcement	Phosphating steel wire	Piping Laying Method	Built on stilts/ Pipeline
Limit Of Tensile	1000KM/23KG	Optical Fiber Material	The Stern Chi/Fofc

PRICE/USD  
Note:words/Logo/can be customized.



# Passive and active electrical equipment



CATV SPLITTER




User Box Series



Connector



Connector

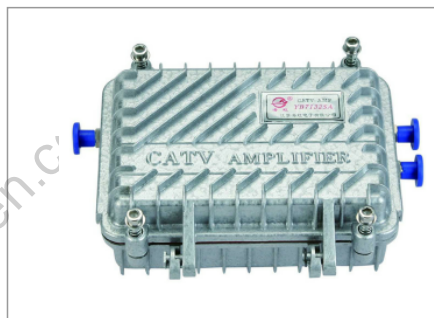

Amplifier



FTTH Optical Receiver



FTTH optical receiver



Outdoor Optical Receiver



1310/1550 Optical Transmitter




EDFA



High Power EDFA



Outdoor fiber Receive

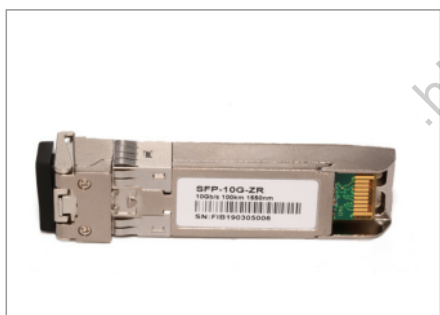

SPF Optical Module



Amplifier Module



# Optical Fiber Adapter Series

www.hhdz-en.c



FC Adapter



SC/UPC Adapter



SC Duplexer Adapter



SC/APC Adapter



SC/APC Duplexer Adapter



SC Multimode Adapter



LC/UPC Adapter



LC/APC Adapter



LC Quadruplex Adapter



LC/UPC Fixed Attenuator





FC/SC Convertor




SC Fixed Attenuator



Special Waterproof Flange(Adaptor)

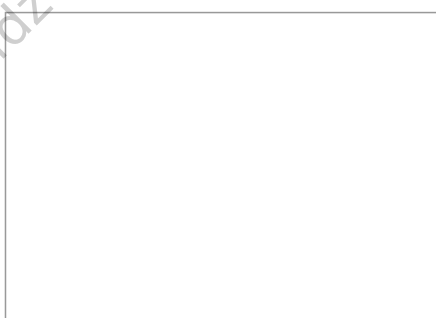

以诚待人 以信立企  
With sincerity to enterprise

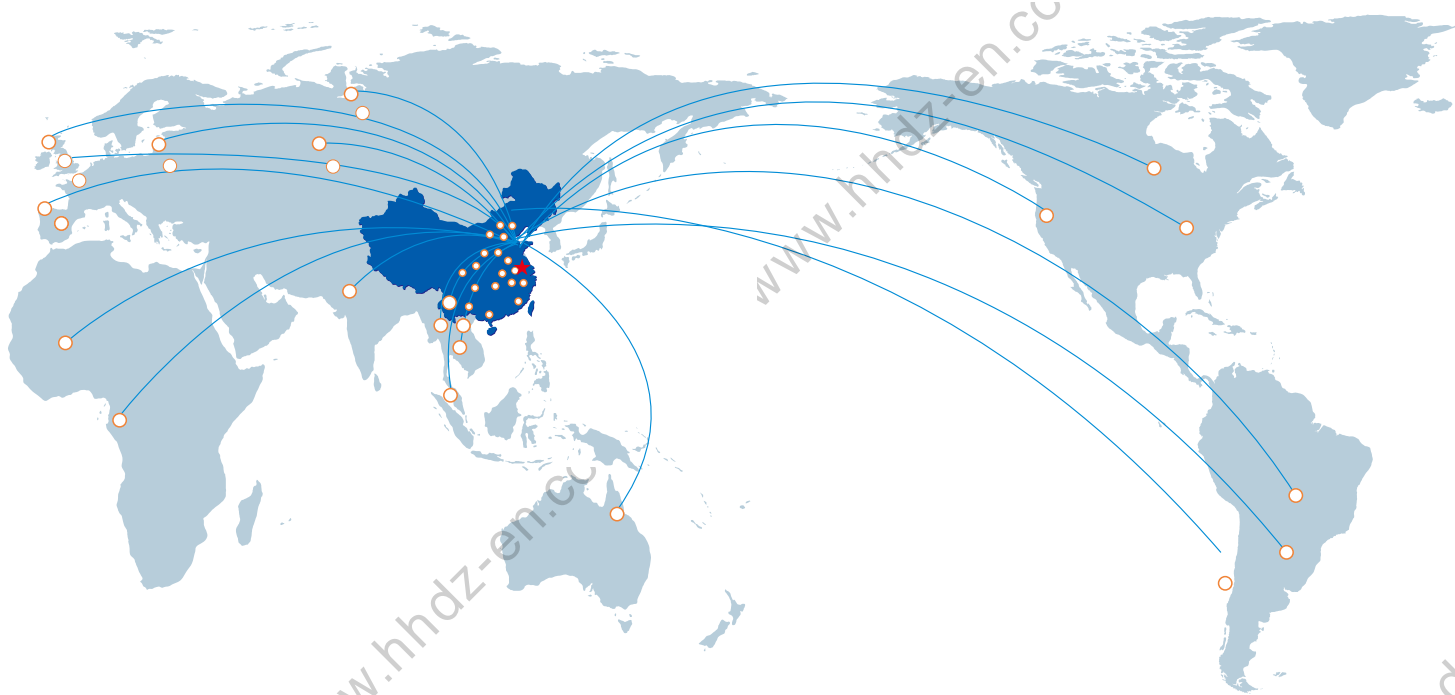

## SALES 销售网络 NETWORK

多年来，本公司凭借雄厚的实力、良好的信誉以及严格的质量管理、优质的售后服务，赢得了社会广大用户的一直认可。

For many years, the company relies on powerful strength, good prestige and strict quality management, high-quality after-sales service, win the society has been approved of users.

倾力赢得市场  
EXERT OURSELF TO WIN THE MARKET